



References (s): 06-IFC/1023; 1020.1; 1020.1.4

Page 1 of 1

Types of protection or support required for exterior stairs:



3-STORY OR LESS.

Requires 1-hr fire resistive walls

4-STORY OR MORE.

Requires 2-hr fire resistive walls and ¾-hr protection for all openings within 10ft of the complete length of the stairs.

Fire escape stairs must be structurally supported to the ground, or documentation maintained of successful inspection by a Kansas licensed architect or engineer updated every five years.

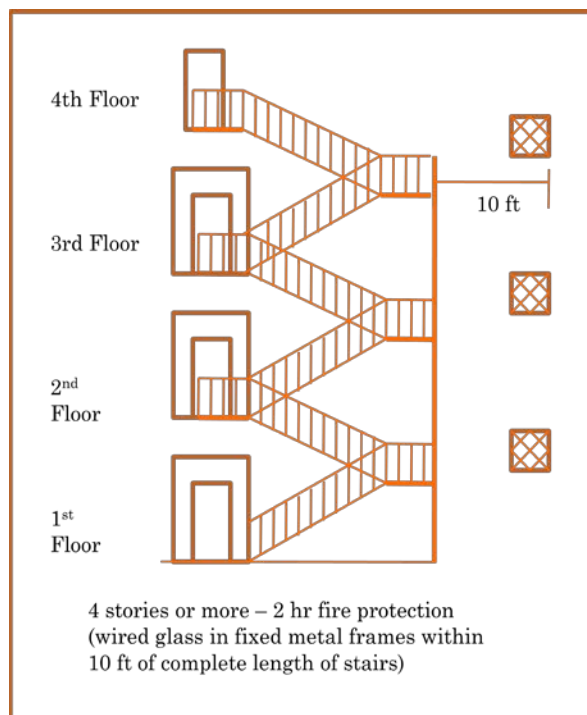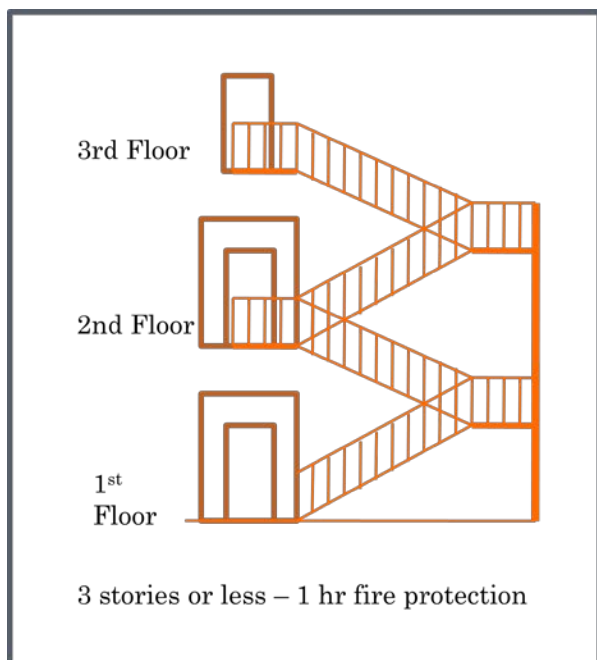

FIRE FACT 048 – EXTERIOR STAIRS